



沈阳三赢重工科技有限公司
SANWIN HEAVY INDUSTRY CO.,LTD

沈阳市于洪区千山西路42-2号

Address: NO. 42-2, Qianshan West Road, Yuhong District, Shenyang City, Liaoning, China

邮编/Mailcode: 110148

电话/ Tel: +86-024-31991866 +86-13940128540

传真/ Fax: +86-024-86191589

邮箱/E-mail: marketing@sanwin.net.cn

主页/Homepage: www.sanwin.net.cn

沈阳三赢重工科技有限公司
SANWIN HEAVY INDUSTRY CO.,LTD

COMPANY PROFILE


公司简介

沈阳三赢重工科技有限公司，成立于2010年，是一家集研发设计、制造销售、安装改造、维修保养为一体的制造企业。公司主营产品涵盖升降机、室内维修行车、中锁提升油缸、摆动油缸及司机室驱动装置等港口专用配套设备。企业资质体系完善，持有国家特种设备生产许可证及其型式试验合格证，顺利通过ISO9001、ISO14001和ISO45001质量、环境、职业健康安全管理体系认证。公司配备技术力量雄厚的研发团队，设计和制造对标欧洲行业标准，性能稳定。同时组建专业化的安装及售后团队，为售出产品的安装、调试护航，让客户全程无忧。

SANWIN HEAVY INDUSTRY CO.,LTD was set up in 2010.It is a manufacturing enterprise integrating R&D, design, production, sales, installation, rebuilding, maintenance and servicing. The main products include port equipment such as Industry lift, maintenance cranes, Hydraulic Buffer, HY-RO-AC Actuator and Cab' s drive. With a complete qualification system, the enterprise holds the National Special Equipment Production License and corresponding type test certificates, and has obtained ISO 9001, ISO 14001 and ISO 45001 certifications for quality, environmental, occupational health and safety management systems. Equipped with a strong R&D team, the company designs and manufactures products in line with European industry standards to ensure stable performance. Meanwhile, a professional installation and after-sales team provides full support for the installation and commissioning of sold products, delivering a worry-free experience for customers.



● 齿轮齿条式升降机 >>
Rack and Pinion Industry lift

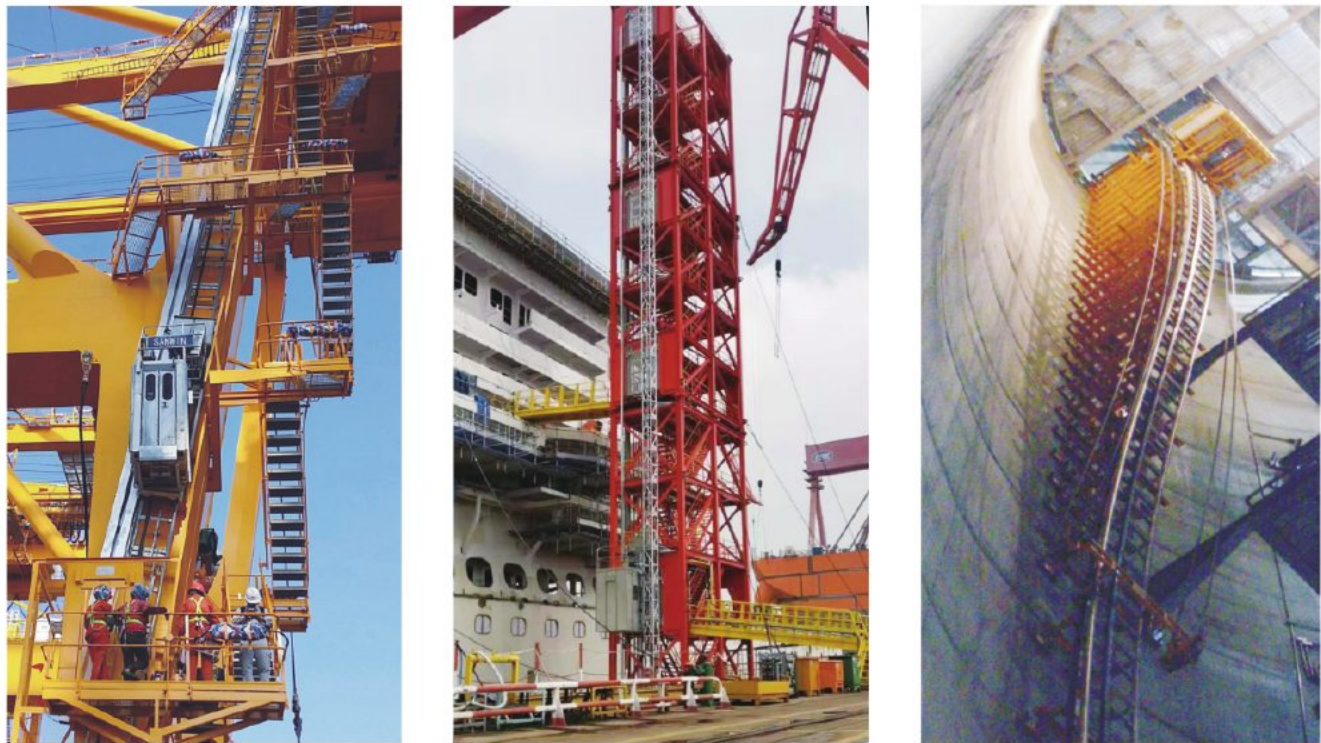

● 曳引式升降机 >>
Wire Rope Industry Elevator



驱动机构 Drive Unit 轿厢外 Car 轿厢内 Car 呼梯盒 Calling box



控制面板 Panel 离心限速器 Centrifugal brake 层门 Landing door

Industry lift
It is used for container crane, power station, cement plant, offshore gas platform. It can climb inclined and curved path, indoor or out door.

工业电梯
工业电梯主要用于港口，电厂，海上钻井平台，既可用于室内，也可用于室外。

Configuration

Payload(KG)	400	500	3000
Rated speed(m/s)	0.5 / 0.7 / 1		

● 典型技术参数 >>

型号: LH
额定起重量: 16t及以下
起升速度: 10/1米/分/变频调速
小车行走: 10米/分
大车行走: 10米/分

● 系统驱动及控制产品: 双卷简单钩起升、分别驱动运行 >>

起升电机—子母电机/双绕组电机/变频无极调速电机
供电方式—滑触线/电缆拖令
控制方式—操作手柄/遥控器
制动器—锥形转子制动器/电磁盘式制动器
变频器(选用)—安川系列/西门子系列/ABB系列

● 产品特点 >>

内置式行星减速机, 结构紧凑, 优化设计。
高起升, 极限位置小, 设有多重限位保护。
设置棘轮棘爪装置为二次制动, 更加安全可靠。

Typical technical parameters
Model:LH
Rated load:16t and below
Lifting speed:10/1 m/min /frequency speed control
Traveling speed of small vehicle:10m/min
Traveling speed of large vehicle:10m/min

System driven and controlled product:
Lifting motor—dual-motor/double--winding motor/variable frequency motor
Power supply mode—slide wire/cable festoon
Control mode—operating handle/remote control
Brake—conic rotor brake/electromagnetic disc brake
Frequency converter(optional)—Yaskawa series/Siemens series/ABB series.


Product features
Built-in planetary reducer,with compact structure and optimized design.
Great hoisting height,multiple limit protection.
Ratchet and pawl device is a double brake device,and the product is therefore safer and more reliable.

● 典型配置Typical Configuration >>

起升电机 Hoisting motor	30KW	V = 10/1m/min
小车行走电机 Walking motor	0.55KW×2	V = 10m/min
大车行走电机 Walking motor	0.75KW	V = 10m/min

● 业务模式Business Model >>

产品供货方式: 协调、设计、生产、安装、调试、验收、资料、培训、售后服务。
产品供货范围: 起升机械、小车总成、桥架总成、维修平台、操作手柄、控制系统。

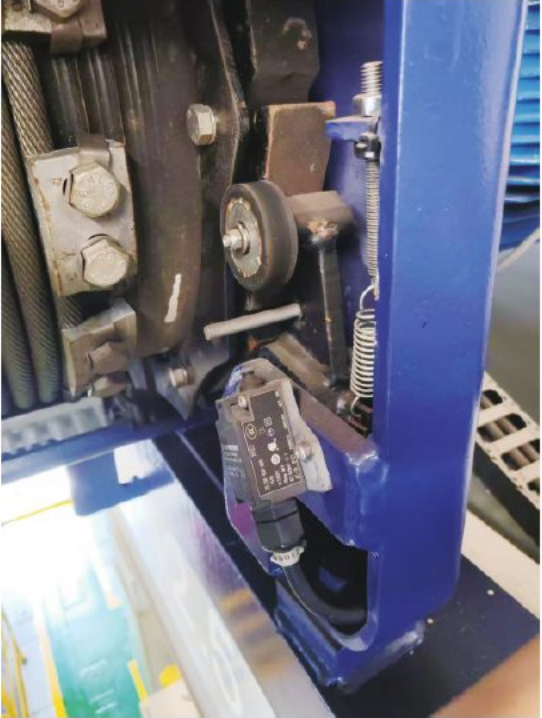




- 舒适性高
 - 减速机通过碟簧直接拉动吊笼，缓冲震动。
 - 经济性好
 - 驱动机构可以降低能耗30%，每年可以节省电费6~9万元。
 - 安全性高
 - PLC 控制系统实现自动平层，防止冲底和冲顶。
-
- Superior comfort
 - The gearbox pull cage directly by discs spring.Buffer shocks.
 - Economic
 - The drive unit can reduce energy consumption by 30%.
 - Safty
 - PLC control system can make landing automatic and prevent rush off mast.



Technical data

Model	Payload	Speed	Motor
PH2032	2000KG	30m/min	2x11kw
PH2032FC-L	2000KG	0-33m/min	2x11kw
PH2032FC-L	2000KG	0-46m/min	2x19kw
PH2032FC-M	2000KG	0-55m/min	2x19kw
PH2032FC-M	2000KG	0-63m/min	2x26kw
PH2032FC-M	2000KG	0-90m/min	3x15kw
Cage size(L×W×H)		3.0m×1.5m×2.25m	

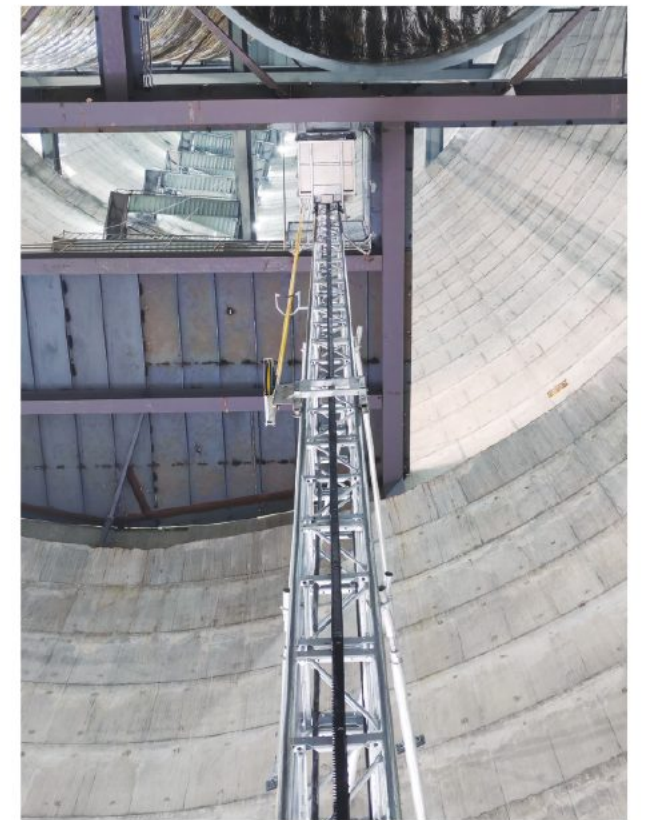


● 基本性能 Basic Performance >>

额定工作压力 15Mpa
Rated working pressure
输出扭矩N.M 2815
Output torque N.M



● KZJ20E外形图、安装尺寸 >>

Outline Drawing and Installation Size of KZJ20E

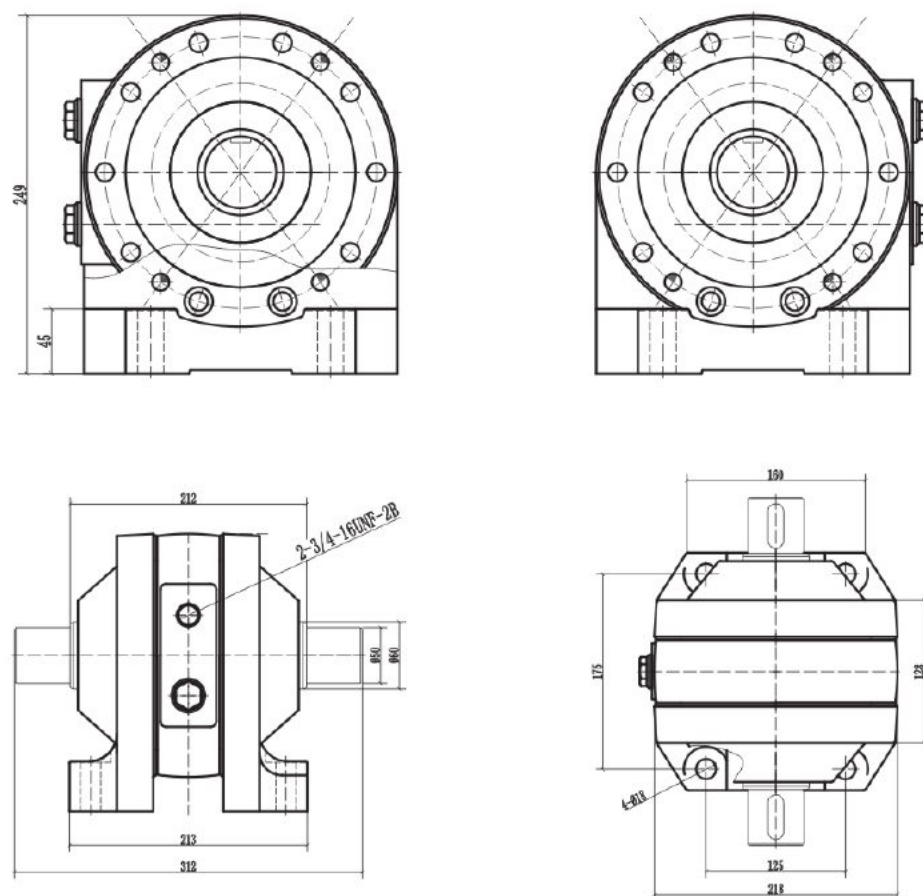


● 基本性能 Basic Performance >>

额定工作压力 15Mpa
Rated working pressure
输出扭矩N.M 2815
Output torque N.M



● KZJ30E外形图、安装尺寸 >>

Outline Drawing and Installation Size of KZJ30E

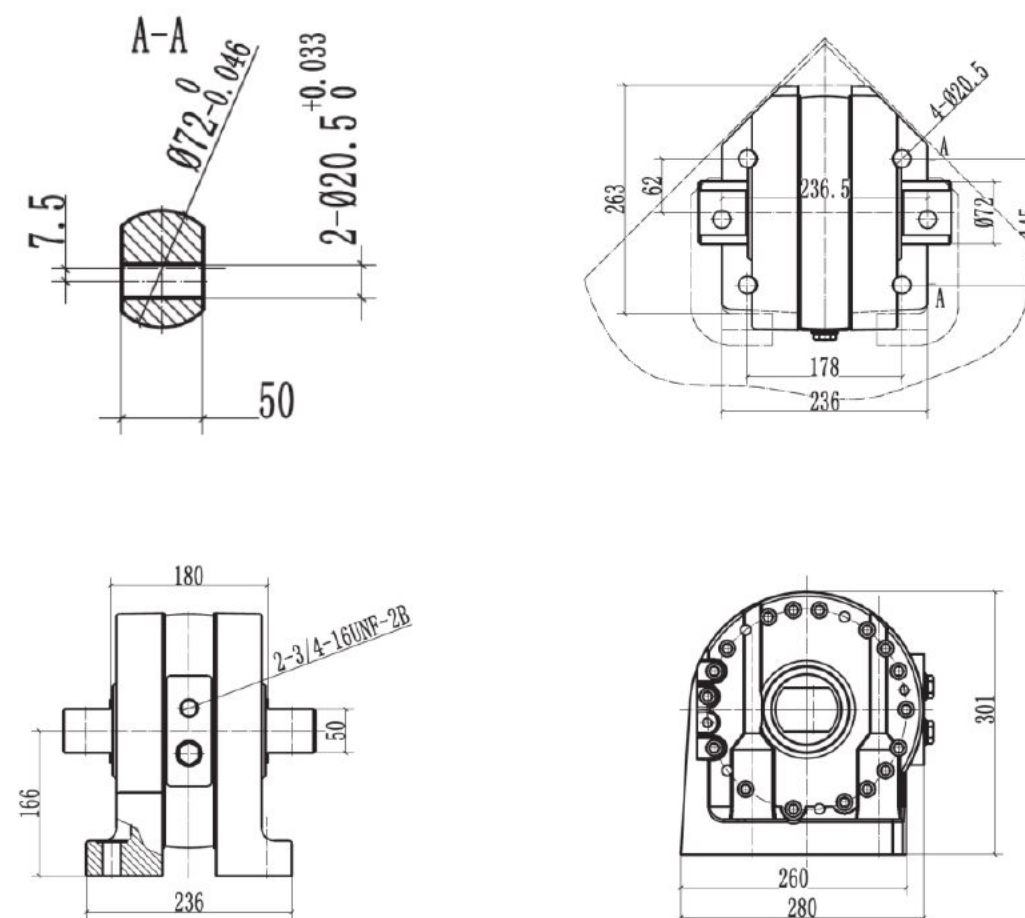



安装孔中心距	840
安装孔直径	Φ25
油缸行程	290mm
充气压力	16Mpa
活塞杆直径	Φ40
轴承型号	Ge25

注：本公司还可定做各种油缸和气液缓冲器



形式	双电机全驱形式
司机室重量	6000KG
司机室运行速度	0----20m/min交流变频调速
电机功率	1.5KW; 2.2KW
电机参数	380V50Hz 1500rpn IP55 B5（卧装立式）
轨距	1600; 1800; 1900; 2000; 2200; 2400
耳板中心高	85; 120
耳板最外侧宽度	166; 190
轨道型号	I25a

注：本公司还可定做各种行走驱动机构及其它部件。

